

# COMBINATION ACOUSTICALLY PACKED CHAMBER BLOWER

## 25 to 30 dBA Noise Reduction


### MB31 OVERVIEW

The MB31 provides the highest degree of overall noise attenuation on blower intakes or discharges. Use an MB31 where background noise is extremely low and the best degree of silencing is required.

Typical applications: Rotary positive blower intake and discharge


### FEATURES

- Advanced acoustical design
- High quality sound absorbing material
- Packed inlet
- Prime coated exterior finish

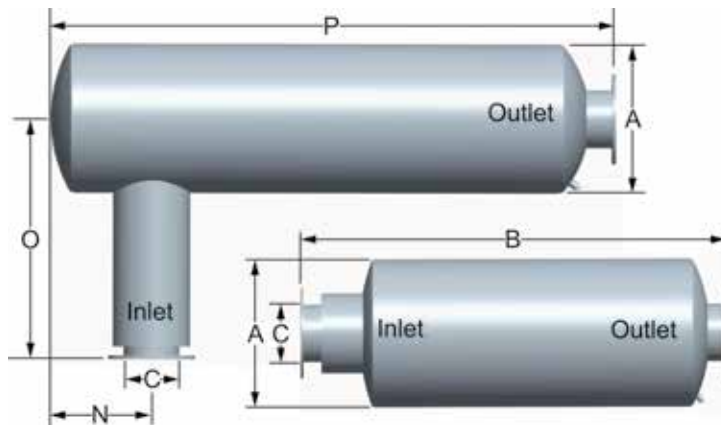

### OPTIONS / ACCESSORIES

- Stainless steel or monel construction
- Flanged connections
- Standard pipe size necks
- Horizontal or vertical support arrangements
- Special paint
- Complete range of exhaust accessories

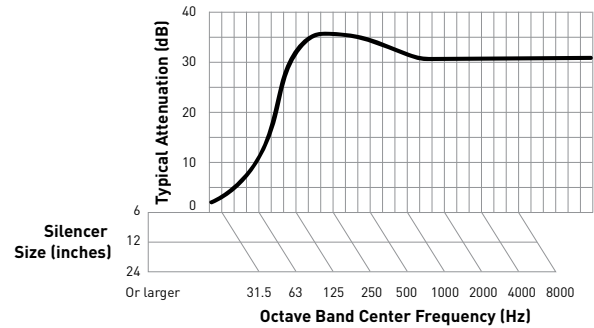

### MB31

Part No.*	Size / ØC	ØA	B	N Min	N Max	O	P	Est Wt
MB31-4	4	14	52	8.5	19	23	45	150
MB31-5	5	16	60	10	21.5	26	52.25	195
MB31-6	6	18	69	10	26.5	30	60.25	250
MB31-8	8	22	84	11	33.5	36	73.5	380
MB31-10	10	26	101	13.5	40	43	88	620
MB31-12	12	30	121	15	50	51	106.25	1030
MB31-14	14	36	115	18	44	52	99.25	1230
MB31-16	16	40	135	20	53	59	116.5	1815
MB31-18	18	45	140	25	54	58	124	2750
MB31-20	20	50	159	26	64	59	141.25	3210
MB31-22	22	54	177	29	71	60	154.25	3895
MB31-24	24	60	184	30	73	60	162.25	4330
MB31-26	26	64	204	31	84	60	180.5	5005
MB31-28	28	68	223	33	92	62	197.75	6625
MB31-30	30	72	241	34	102	62	213.75	7315
MB31-32	32	76	250	36.5	102.5	64	220.75	8415
MB31-34	34	82	252	37.5	102.5	64	220.5	8995
MB31-36	36	86	254	37.5	102.5	65	221	9485

- All dimensions are in inches. All weights are in pounds. Weights are approximate.
- Listed sound data is based on typical performance and should not be considered absolute.
- \*See [nomenclature guide](#) for additional information on part number creation.

