

MARINE ENGINE / WET EXHAUST SILENCERS

20 to 25 dBA Noise Reduction

MP31 OVERVIEW

Constructed of 316L stainless steel, the MP31 offers very good noise attenuation with medium pressure drop in marine exhaust systems where water is injected upstream of the silencer. Mixed exhaust flow temperature not to exceed 200 °F at silencer inlet.



Typical Applications: Internal combustion engines using wet type exhaust

OPTIONS / ACCESSORIES

- Monel construction
- Flanged connections
- Horizontal or vertical support arrangements
- Complete range of exhaust accessories

FEATURES

- Advanced acoustical design
- Reduces noxious fumes and odors
- Thick wall construction for high transmission loss
- All welded construction and long service life
- Standard pipe size O.D. stubs
- Easy installation in any position

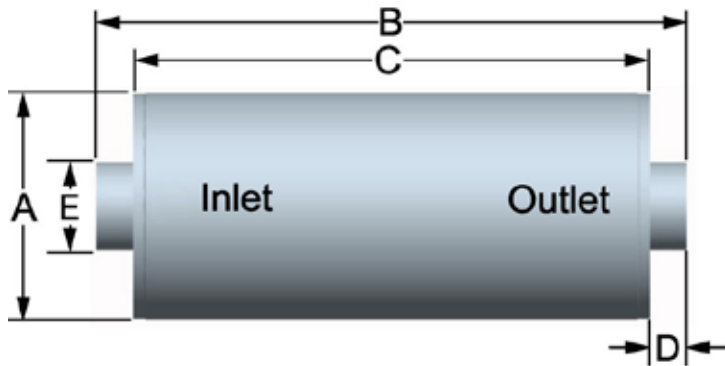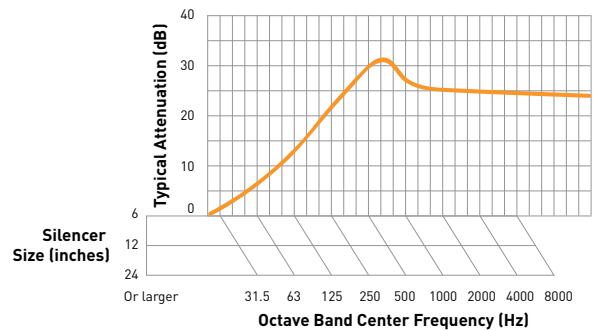

MP31						
Part No.*	Size / ØE	ØA	B	C	D	Est Wt
MP31-4	4	8.75	30	24	3	39
MP31-4.5	4.5	10.75	36	30	3	61
MP31-5	5	10.75	36	30	3	61
MP31-6	6	12.75	42	36	3	94
MP31-8	8	16.75	60	48	6	143
MP31-10	10	20.25	70	58	6	230
MP31-12	12	24.25	82	70	6	327

- All dimensions are in inches. All weights are in pounds. Weights are approximate.
- Listed sound data is based on typical performance and should not be considered absolute.
- *See [nomenclature guide](#) for additional information on part number creation.

