

# LOW PRESSURE DROP/TURBO SILENCER

## 13 to 16 dBA Noise Reduction


### MT22 OVERVIEW

The MT22 silencer is engineered to provide silencing in areas where background noise is relatively high and moderate silencing is needed, and back pressure requirements call for a low pressure drop silencer.

Typical Applications: Internal combustion engine intakes and exhausts, as well as turbo charged reciprocating engines with low allowable back pressure

### FEATURES


- Advanced acoustical design
- All welded construction and long service life
- Easily installed in any position
- High heat silicone black finish
- Two chambers
- Drain connection

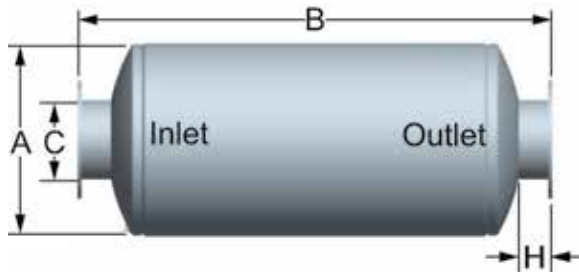

Type 1 - EIEO

### OPTIONS / ACCESSORIES

- Explosion relief cover
- Flexible connectors
- Companion flanges
- Cleanout openings
- Custom inlet/outlet size, location and multiple orientations available
- Horizontal or vertical support arrangements
- Aluminized steel, Stainless Steel 304 or 316 construction available
- Special paints and finishes available
- Complete range of exhaust accessories

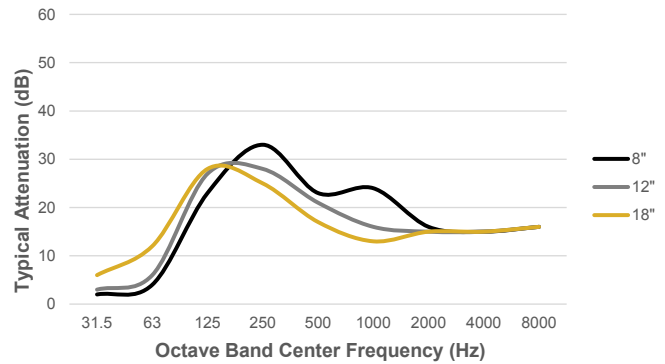

MT22					
Part No.*	Size / ØC	ØA	B	H	Est Wt
MT22-4	4	14	36	4	64
MT22-5	5	16	43	4	87
MT22-6	6	18	49	4	109
MT22-8	8	22	59	4	181
MT22-10	10	26	64	4	290
MT22-12	12	30	77	4	440
MT22-14	14	36	83	5	593
MT22-16	16	40	90	5	813
MT22-18	18	45	96	5	963
MT22-20	20	50	109	5	1438
MT22-22	22	54	119	5	1845
MT22-24	24	60	125	5	2194
MT22-26	26	64	140	5	2573
MT22-28	28	68	155	5	2966
MT22-30	30	72	166	5	3381

- All dimensions are in inches. All weights are in pounds. Weights are approximate.
- Listed sound data is based on typical performance and should not be considered absolute.
- \*See [nomenclature guide](#) for additional information on part number creation.

