

OVERVIEW

**Atmospheric Vent Silencer for Very High Attenuation of High Frequency Noise:
Expected Attenuation is 50 to 55 dBA**

Use for the best vent silencing of high frequency noise associated with steam or gas vents. The VT-3 provides the maximum noise reduction that can be practically obtained.

TYPICAL APPLICATIONS


- Process vents
- Safety and relief valve discharge
- Small process vents
- Compressor & gas transmission line blowdown

FEATURES

- Advanced acoustical design
- Heavy duty, all welded construction and long service life
- Long strand glass wool packing
- Prime coated exterior finish
- ASME code inlet available

OPTIONAL ACCESSORIES

- Companion flanges
- Metallic wool packing
- Side inlet connection
- Horizontal or vertical support arrangements
- Flanged inlet
- Special paint
- Stainless steel construction

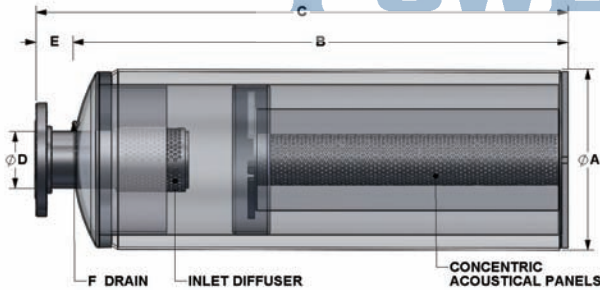

Size	A	B	C	D	E	F	Est Wt.
14"	14	74 ½	77 ½	4	3	1	315
18"	18	89 ½	92 ½	6	3	1	458
22"	22	118	121	6	3	1	732
26"	26	132	135	8	3	1	1034
30"	30	155 ½	159	10	3 ½	1	1768
36"	36	184 ½	187 ½	12	3 ½	1	2656
40"	40	207	210 ½	14	3 ½	1	3467
45"	45	235 ½	239	16	3 ½	1	4487

Note: Dimensions are in inches, weights are in pounds.

