

**Atmospheric Vent Silencer for Small Gas Flow Rates:
Expected Attenuation is 35 to 40 dBA**


For relatively small vent applications, the VT-S offers impressive silencing of the noise associated with steam or gas vents. The VT-S has a very high performance to cost ratio.

OVERVIEW

- FEATURES**
- Advanced acoustical design
 - Heavy duty, all welded construction and long service life
 - Acoustical wool packing
 - Prime coated exterior finish
 - ASME code inlet available

- OPTIONAL ACCESSORIES**
- Companion flanges
 - Metallic wool packing
 - Stub inlet and outlet connection
 - Horizontal or vertical support arrangements
 - Special paint
 - Stainless steel construction

- TYPICAL APPLICATIONS**
- Steam ejectors
 - Small steam or gas vents
 - Small process vents
 - Turbine and compressor bypass
 - Small safety and relief valves

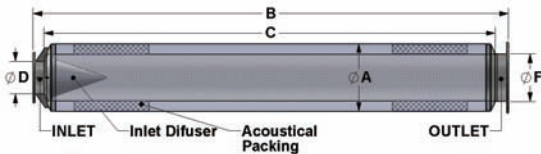

Size	A	B	C	D	E	F	Est Wt.
5"	12	66	60	2	3	5	98
6"	12	78	72	3	3	6	112
8"	14	86	80	4	3	8	152
10"	16	106	100	6	3	10	250
12"	18	127	120	8	3 1/2	12	340

Note: Dimensions are in inches, weights are in pounds.

