

CHAMBER TYPE BLOWER SILENCER

15 to 30 dBA Noise Reduction

MB21 OVERVIEW

An efficient economical design, the MB21 is useful on blower intakes or discharges. Use an MB21 where some background noise is always present and high degrees of silencing is not required.



Typical applications: Rotary positive blower intake and discharge (10" size and below)

FEATURES

- Advanced acoustical design
- Prime coated exterior finish

OPTIONS / ACCESSORIES

- Stainless steel or monel construction
- Flanged connections
- Standard pipe size necks
- Horizontal or vertical support arrangements
- Special paint
- Complete range of exhaust accessories

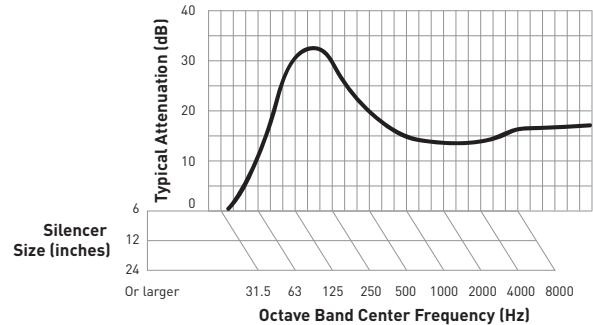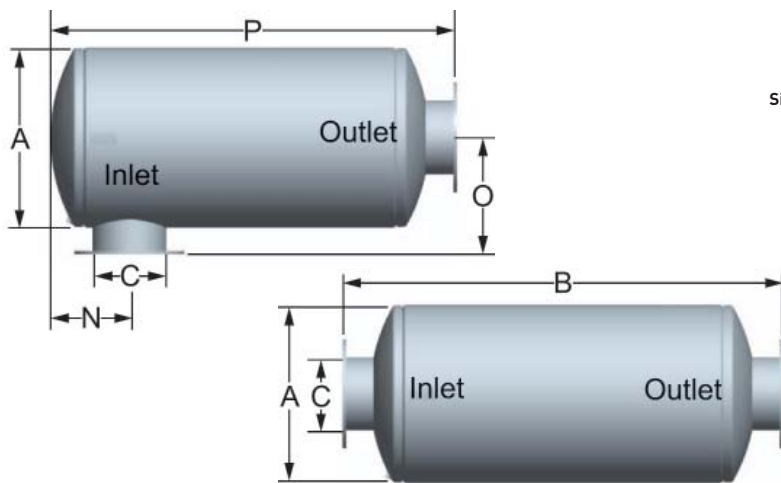

MB21							
Size / ØC	ØA	B	N Min	N Max	O	P	Est Wt
4	14	48	5.5	22	10	45	110
5	16	55	6.5	25	11	52.25	120
6	18	63	7	29.5	12	60.25	170
8	22	76	8.5	36.5	14	73.5	285
10	26	91	10.5	43	16.5	88	460
12	30	109	12	53	18.5	106.25	745
14	36	102	14	48	21.5	99.25	965
16	40	119	17	56	23.5	116.5	1340
18	45	127	19	60	26.5	124	1850
20	50	144	21	69	29	141.25	2175
22	54	161	22	78	31	158.5	2650
24	60	165	24	79	34	162.25	3400
26	64	183	26	89	36	180.5	3850
28	68	200	27	98	38	197.75	4840
30	72	216	29	107	40	213.75	5150

Note: Dimensions are in inches, weights are in pounds.

