

LOW PRESSURE DROP/TURBO SILENCER

13 to 16 dBA Noise Reduction

MT22 OVERVIEW

The MT22 silencer is engineered to provide silencing in areas where background noise is relatively high and moderate silencing is needed, and back pressure requirements call for a low pressure drop silencer.


Typical Applications: Internal combustion engine intakes and exhausts, as well as turbo charged reciprocating engines with low allowable back pressure

FEATURES

- Advanced acoustical design
- All welded construction and long service life
- Easily installed in any position
- High heat silicone black finish
- Two chambers
- Drain connections


OPTIONS / ACCESSORIES

- Explosion relief cover
- Flexible connectors
- Companion flanges
- Cleanout openings
- Custom inlet/outlet size, location and multiple orientation types available
- Horizontal or vertical support arrangements
- Aluminized steel, Stainless Steel 304 or 316 construction available
- Special paints and finishes available
- Complete range of exhaust accessories

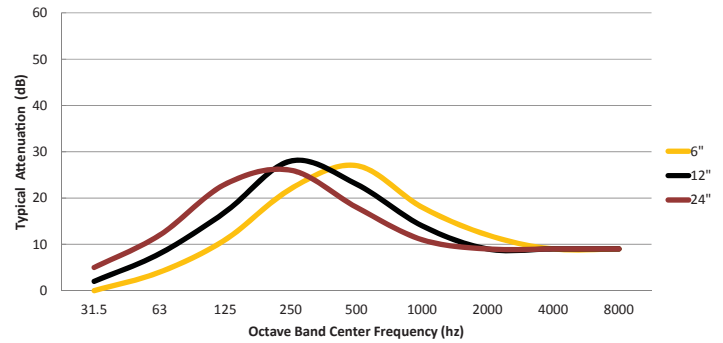

MT22					
Size / ØC	ØA	B	H	Est Wt	
4	14	36	4	64	
5	16	43	4	87	
6	18	49	4	109	
8	22	59	4	181	
10	26	64	4	290	
12	30	77	4	440	
14	36	83	5	593	
16	40	90	5	813	
18	45	96	5	963	
20	50	109	5	1438	
22	54	119	5	1845	
24	60	125	5	2194	
26	64	140	5	2573	
28	68	155	5	2966	
30	72	166	5	3381	

Note: Dimensions are in inches, weights are in pounds.

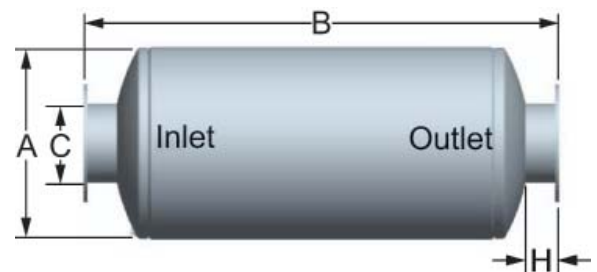

Type 1 - EIEO

